

Authentic original grade-A molicel P42A INR-21700 4200MAH 3.6v lithium rechargeable battery

Our Product Introduction

for more products please visit us on enookbattery.com

Basic Information

- Brand Name: Molicel
- Certification: UN38,3/CNAS/KC
- Model Number: 21700
- Minimum Order Quantity: 2000
- Payment Terms: T/T, Western Union



Product Specification

- Weight: 65g
- Capacity: 4200mAh
- Size: 21*70mm
- Type: Flat Top
- Warranty: 1years
- Voltage: 3.7v~ 4.2v
- Charging Temperature: 0°C~50°C
- Discharging Temperature: -20°C~75°C



More Images



Hot sell New Original 3.7v 18650 HG2 3000mAh Lithium Rechargeable Batteries Continuous Discharge 30A

Product Description:


1. Do not overcharge or over-discharge batteries. It will decrease the batteries' service life; -----
2. Do not short circuit, incinerate and disassemble batteries;
3. Do not impact the battery;
4. Do not drop or cause unnecessary shocks to the batteries;
5. Do not carry loose batteries in a pocket or purse with metal objects like coins, paper clips etc;
6. Do not use inferior charger to recharge this battery in case of damaging the battery;
7. Do not put the battery in the charger too long;
8. Put it beyond the reach of children.

Item of Efan battery	Condition/Note	Specification
21700 4200mAh battery	Nominal Capacity	4200mAh
	Nominal Voltage	3.7V
Standard charge	constant current	0.2C
	constant voltage	4.2V
	end current(cut off)	100mA
NCR battery fast charge	constant current	1C
	constant voltage	4.2V
	end current(cut off)	100mA
Standard discharge	constant current	30A
	end voltage(cut off)	2.5V
Fast discharge	end voltage(cut off)	2.5v
Maximum discharge Current	pulse current	45A
3.7V 21700 battery weight	approximate	65g
Operating temperature	charge	0-45 °C
	discharge	-10-65 °C
Storage temperature	1 month	-10-45 °C
	6 months	-10-35 °C
	1 year	-10-30 °C
Efan battery dimension (Diameter & Height)		D21±0.2mm H70±0.2mm

■ CELL CHARACTERISTICS

Capacity	Typical	4200 mAh
	Minimum	4000 mAh
Cell Voltage	Nominal	3.6 V
	Charge	4.2 V
Charge Current	Standard	4.2 A
	Standard	1.5 hr
Discharge Current	Continuous	45 A
	Charge	0°C to 60°C
Temperature	Discharge	-40°C to 60°C
	Volumetric	615 Wh/l
Energy Density	Gravimetric	230 Wh/kg
	Typical	AC (1 KHz)
Impedance	DC (10A/1s)	10 mΩ
	DC (10A/1s)	16 mΩ

■ PHYSICAL CHARACTERISTICS




Shape	Cylindrical
Can	Steel
Diameter	21.7 mm (Max)
Height	70.2 mm (Max)
Weight	67 g (Typical)


The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice.

For application specific information, please contact E-One Moli Energy Sales and Applications or the nearest MOLICEL® recognized agent.


■ Charge Characteristics




■ Discharge Rate Characteristics



■ Discharge Temperature Characteristics



■ Cycle Characteristics



Advantages:

- 1, High capacity
- 2, Excellent safety performance
- 3, Excellent storage performance and low self-discharge rate
- 4, Safe Performance
- 5, short circuit test passed
- 6, 150C thermal shock test passed
- 7, 1.2m drop test passes
- 8, Cycle life: 500 times
- 9, Charging temperature: 0 to 45 degree Celsius
- 10, Discharging temperature: -20 to 60 degree Celsius
- 11, Storage temperature: -20 to 45 degree Celsius
- 12, PCB/PCM and battery pack available
- 13, Other sizes and capacities can be supplied

Support and Services:

18650 Battery Technical Support and Service

We offer comprehensive technical support and service for our 18650 Batteries. Our team of knowledgeable professionals are available to answer your questions and provide you with the technical information you need. From installation and troubleshooting to product performance and maintenance, we are here to help.

Company Introduction

Company Introduction

ShenZhen Enook Technology Co., Ltd company is professional manufacturer and supplier of lithium energy solutions, E-bike battery pack, which focus on manufacturing and designing of lithium cells and battery packs






Quality first is our principle, Satisfying all our customers is our tenet, win-win business is our aim. Dedicated to strict quality control and thoughtful customer service, our experienced staff members are always available to discuss each detailed requirements from customer and ensure full customer satisfaction.



In addition, we have obtained certificates. MSDS UN38.3 MSDS, ROHS, UL, etc. All our products keep selling well not only around China, but also in USA, Philippines, Germany, England, Australia, Russia, France and other European and Asia countries.

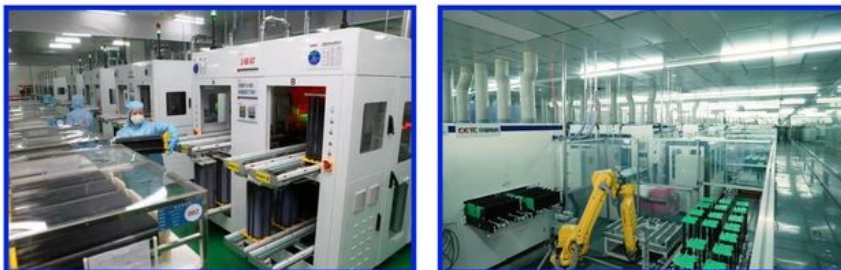

Fast delivery is one of our advantage, selecting a current products from catalogue, or customized products, 3~5 days is the normal time to prepare for the goods, OEM & ODM orders can be acceptable.

Quality is our life, price is our core competence, please don't hesitate to contact us if you have any requirement, we'll provide our best service to you.

Has passed CE certification and ROHS certification, excellent quality the company has obtained a number of patented technologies.

CERTIFICATES

**OUR CERTIFICATES GIVE YOU RELIABLE
SUPPORT FOR YOUR ORDERS**



Packing and Shipping:

Packaging and Shipping

18650 batteries must be packaged with extreme care. Each battery must be individually wrapped in an insulated material designed to prevent shorts. The entire package must be placed in a static-resistant bag or box before being shipped. Batteries must never be shipped in bulk or loose without proper packaging.

Batteries should always be shipped via a tracked courier such as FedEx or UPS. The courier should be notified of the battery shipment and the package must be labeled as containing hazardous materials. The package should also be marked with the proper shipping class, such as Class 8, for lithium batteries.

PACKAGING

PACKAGING



Shipping by



Professional suggestion to choose the best shipping delivery (Such as EMS DHL TNT UPS and FEDEX) for your commodities according to your demand.

FAQ:

Q1: When are you available?

A1: 24 hours online every day

Q3: How is the quality of the products?

A3: 1.Always provide the premium authentic products,never fake

2.Only provide A Grade cells

Q4: Do you provide the OEM&ODM service?

A4: Yes,of course.We will try our best to meet our customers' requestment

Q5: What's the lead time?

A5: 1.Sample orders: 1-3 working days

2.Bulk orders: 3-7

working days according to different quantities

3.OEM: 7-12 working days on receipt of sample confirmation

Q6: What's the shipping?

A6: 1.We will choose the most safest and the most economical shipping way for you

2.Always 3-7 days from China to the destination country.Please note that some remote area may 1-3 days delay

Q7: What's the payment?

A7: T/T ,Western Union & Paypal

Q8: What's the warranty of the products?

A8: 1.12 Months warranty

2.Once any problem,please send us HD videos and pictures to show the problem you met,if it's our problem,we will send you new products or full refund except artificial damage



Changsha Enook Technology Co., Ltd



+8617752866093



wendy@enooktech.com



enookbattery.com

ROOM 1717,JIEZUO BUILDING, NO. 828, SECTION 1, FURONG SOUTH ROAD, TIANXIN DISTRICT,
CHANGSHA, HUNAN