

China ENOOK

USD5-10USD/PC

5 working days

10000PCS/Month

T/T

3.7V

packed in professional carton

# Customized 3.7 V 5200mah Lithium Battery Pack For Electric **Tools**

### **Basic Information**

- Place of Origin:
- Brand Name:
- YC-3.7v Model Number: 10
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



## **Product Specification**

- Voltage:
- Battery Type:
- Capacity: • Warranty:
- Color:
- Highlight:

Li-ion Batterty
5200MAH
1years
Blue
Customized 3.7 V 5200mah Lithium Battery, 3.7 V 5200mah Lithium Battery, Electric Tools 3.7 V Lithium Battery Pack



## More Images



#### **Product Description**

## Enook 3.7v 5200mah with Customized Lithium battery pack for electric tools

Name: Battery3.7V-5.2AH Li-ion Battery Pack Case: oem Charger: 3.7v Application: electric tools

support customized service for you

NO. 序号	Item项目		Specifications规格要求
4.1	Nominal capacity 杤	称容量	5200mAh 0.5C Discharge (0.5C放电)
	Min capacity 最	小容量	5198mAh 0.5C Discharge (0.5C放电)
4.2	Nominalvoltage 杤	称电压	3. 7V
4.3	Charge current	医电电流	Standard Charge (标准充电流): 0.5C
4. 4	Standard Charging method 标〉 方法	准充电	0.5C CC (constant current) charge to 4.2V,then CV (constant voltage 4.2V)charge till charge current decline to≤0.03C 0.5C CC (恒流) 充电至4.2V,再CV (恒压4.2V) 充电直至充电电流≤0.03C
4.5	Charging time 充品	电时间	Standard Charging (标准充电) <mark>Approx2</mark> hours 大约2小时
4.6	Max.discharge current 最过 电流	大放电	Constant current1C end voltage2.75V(持续电 流: 1C截止电压: 2.75V)
4.7	Standard Discharge Current标〉 电流	准放电	Constant current 0.5 C end voltage2.75V(持 续电流: 0.5C截止电压: 2.75V)
4.8	Discharge cut-off voltage ) 止电压	放电截	2.75V
4.9	Charge cut-off Voltage 充 电压	E电截止	<b>4.</b> 2V
4.10	Initial Impedance 初	始内阻	≪45m <mark>Ω</mark>
4.11	Weight 重复	里	Approx(양기): 90g
4.12	Operating temperature	作温度	Charging(充电): 0℃~45℃ Discharging(放电): -20℃~60℃
4.13	Storage temperature 👔	<b>拵</b> 温度	10°C^30°C
4.14	Storage Humidity 储石	存湿度	≤70% RH
4. 15	Appearance 外	观	Without scratch, distortion, contamination and leakage(无划痕、变形、污迹、电解液泄 露)
4.16	Standard environmental condit 标准环境	tion	Temperature (温度)       : 23±5°C         Humidity (湿度)       : 45-70%RH         Atmospheric Pressure (大气压)       : 86-106pa



**Company Introduction** 

# **Company Introduction**

ShenZhen Enook Technology Co., Ltd company is professional manufacturer and supplier of lithium energy solutions, E-bike

battery pack, which focus on manufacturing and designing of lithium cells and battery packs



Quality first is our principle,Satisfying all our customers is our tenet,win-win business is our aim.Dedicated to strict quality control and thoughtful customer service, our experienced staff members are always available to discuss each detailed requirements from customer and ensure full customer satisfaction.




In addition, we have obtained certificates. MSDS UN38.3 MSDS,ROHS,UL.ect. All our products keep selling wellnot only around China, but also inUSA, Philippines, Germany, England, Australia, Russia, France and other Europen and Asia countries



Fast delivery is one of our advantage, selecting a current products from catalogue, or customized products, 3<sup>-5</sup> 5 days is the normal time to prepare for the goods, OEM & ODM orders can be acceptable.

Quality is our life, price is our core competence, please don't hesitate to contact us if you have any requirement, we'll provide our best service to you.

Has passed CE certification and ROSH certification, excellent quality the company has obtained a number of patented

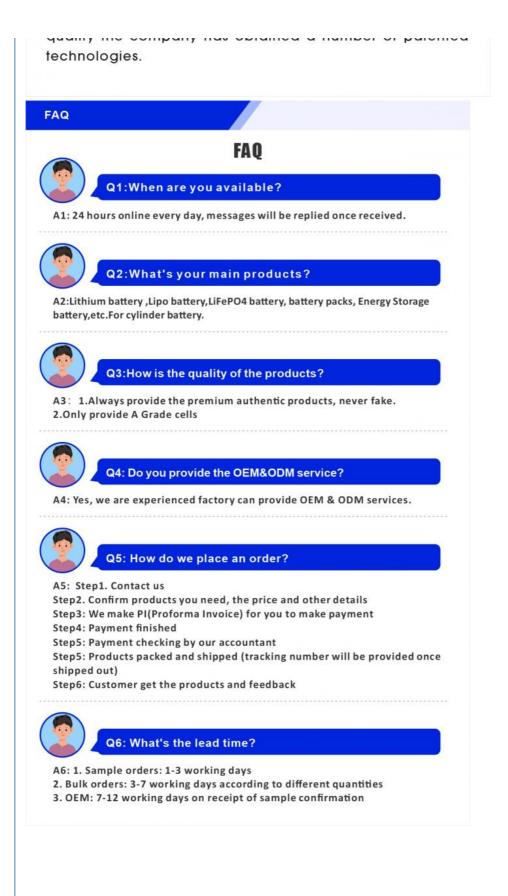



+8617752866093 wendy@enooktech.com enookbattery.com

 ROOM 1717, JIEZUO BUILDING, NO. 828, SECTION 1, FURONG SOUTH ROAD, TIANXIN DISTRICT, CHANGSHA, HUNAN