


## 3S3P 18650 Lithium Ion Battery Pack 2200mah 3.7V 11.1V For electric tools

Our Product Introduction

for more products please visit us on [enookbattery.com](http://enookbattery.com)


### Basic Information

- Place of Origin: China
- Brand Name: ENOOK
- Model Number: HHS-3.7v
- Minimum Order Quantity: 10
- Price: USD5-20USD/PC
- Packaging Details: packed in professional carton
- Delivery Time: 5 working days
- Payment Terms: T/T
- Supply Ability: 10000PCS/Month


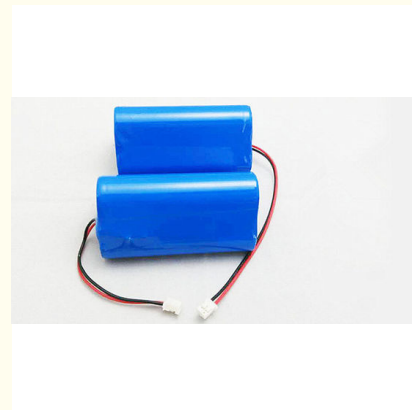


### Product Specification

- Voltage: 3.7V
- Battery Type: Li-ion Battery
- Capacity: 2200MAH
- Warranty: 1years
- Color: Blue
- OEM: Support
- Highlight: **Lithium ion Battery Pack 3.7V ,  
Lithium ion Battery Pack 11.1V ,  
Li Ion 18650 Battery 2200mah 3.7V**

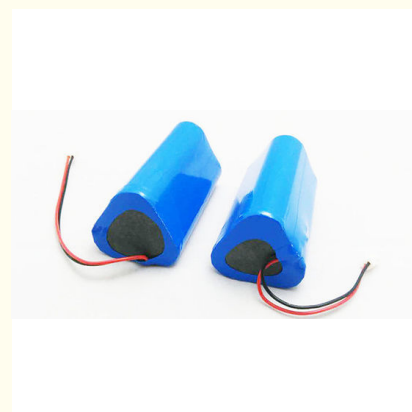


### More Images

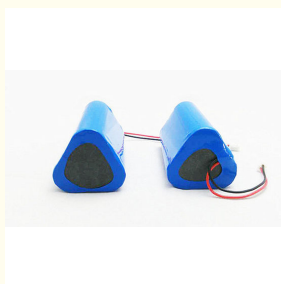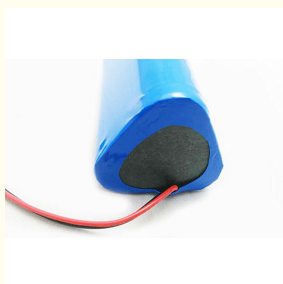

## Product Description

**Enook 3.7V 11.1v 2200mah 3S3P 18650 Lithium Battery Pack With Customized for tools****Name:** Battery3.7V-2.2AH Li-ion Battery Pack**Case:** oem**Charger:** 3.7v**Application:** electric tools  
support customized service for you

| NO.<br>序号 | Item项目                                | Specifications规格要求   |
|-----------|---------------------------------------|--|
| 4.1       | Nominal capacity 标称容量                 | 7800mAh 0.5C Discharge (0.5C放电)  |
|           | Min capacity 最小容量                     | 7750mAh 0.5C Discharge (0.5C放电)  |
| 4.2       | Nominal voltage 标称电压                  | 7.4V   |
| 4.3       | Charge current 充电电流                   | Standard Charge (标准充电流): 0.5C  |
| 4.4       | Standard Charging method 标准充电方法       | 0.5C CC (constant current) charge to 7.4V, then CV (constant voltage 7.4V) charge till charge current decline to $\leq 0.03C$<br>0.5C CC (恒流) 充电至 7.4V, 再 CV (恒压 7.4V) 充电直至充电电流 $\leq 0.03C$ |
| 4.5       | Charging time 充电时间                    | Standard Charging (标准充电)<br>Approx 2 hours 大约 2 小时   |
| 4.6       | Max. discharge current 最大放电电流         | Constant current 1C end voltage 5.5V (持续电流: 1C 截止电压: 5.5V)   |
| 4.7       | Standard Discharge Current 标准放电电流     | Constant current 0.5C end voltage 5.5V (持续电流: 0.5C 截止电压: 5.5V)   |
| 4.8       | Discharge cut-off voltage 放电截止电压      | 5.5V   |
| 4.9       | Charge cut-off Voltage 充电截止电压         | 8.4V   |
| 4.10      | Initial Impedance 初始内阻                | $\leq 65m\Omega$   |
| 4.11      | Weight 重量                             | Approx (约): 90g  |
| 4.12      | Operating temperature 工作温度            | Charging (充电): $0^{\circ}C \sim 45^{\circ}C$<br>Discharging (放电): $-20^{\circ}C \sim 60^{\circ}C$  |
| 4.13      | Storage temperature 储存温度              | $10^{\circ}C \sim 30^{\circ}C$   |
| 4.14      | Storage Humidity 储存湿度                 | $\leq 70\% RH$   |
| 4.15      | Appearance 外观                         | Without scratch, distortion, contamination and leakage (无划痕、变形、污迹、电解液泄露)   |
| 4.16      | Standard environmental condition 标准环境 | Temperature (温度): $23 \pm 5^{\circ}C$<br>Humidity (湿度): 45-70%RH<br>Atmospheric Pressure (大气压): 86-106pa   |
|           |                                       |  |

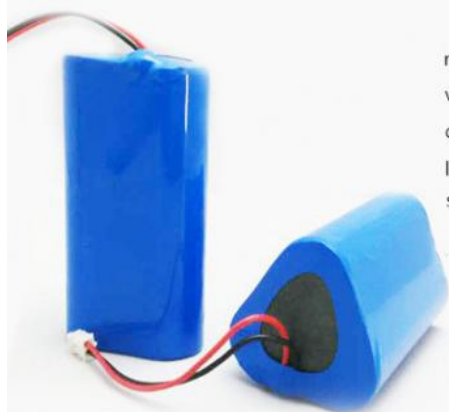

model: 18650-2200mah (customized)  
voltage: 3.7V/11.1V  
combination: 3S/3P  
line: 2.0 terminal/customized  
size: 37\*37\*68mm

## Company Introduction

## Company Introduction


Shenzhen Enook Technology Co., Ltd company is professional manufacturer and supplier of lithium energy solutions, E-bike battery pack, which focus on manufacturing and designing of lithium cells and battery packs



Quality first is our principle, Satisfying all our customers is our tenet, win-win business is our aim. Dedicated to strict quality control and thoughtful customer service, our experienced staff members are always available to discuss each detailed requirements from customer and ensure full customer satisfaction.



In addition, we have obtained certificates. MSDS UN38.3 MSDS, ROHS, UL, etc. All our products keep selling well not only around China, but also in USA, Philippines, Germany, England, Australia, Russia, France and other European and Asia countries

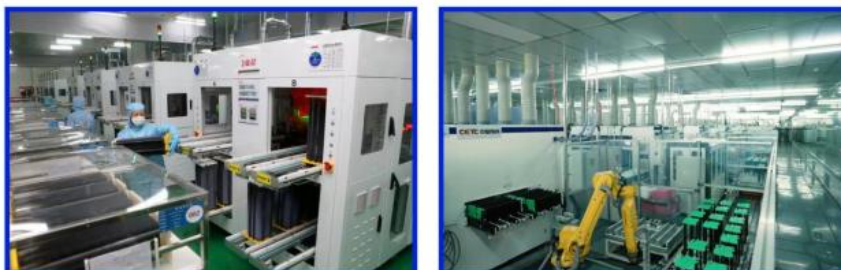

Fast delivery is one of our advantage, selecting a current products from catalogue, or customized products, 3~5 days is the normal time to prepare for the goods, OEM & ODM orders can be acceptable.

Quality is our life, price is our core competence, please don't hesitate to contact us if you have any requirement, we'll provide our best service to you.

Has passed CE certification and ROHS certification, excellent quality the company has obtained a number of patented technologies.

## FAQ

### FAQ



**Q1:When are you available?**

A1: 24 hours online every day, messages will be replied once received.



**Q2:What's your main products?**

A2:Lithium battery ,Lipo battery,LiFePO4 battery, battery packs, Energy Storage battery,etc.For cylinder battery.



**Q3:How is the quality of the products?**

A3: 1.Always provide the premium authentic products, never fake.  
2.Only provide A Grade cells



**Q4: Do you provide the OEM&ODM service?**

A4: Yes, we are experienced factory can provide OEM & ODM services.



**Q5: How do we place an order?**

A5: Step1. Contact us  
Step2. Confirm products you need, the price and other details  
Step3: We make PI(Proforma Invoice) for you to make payment  
Step4: Payment finished  
Step5: Payment checking by our accountant  
Step5: Products packed and shipped (tracking number will be provided once shipped out)  
Step6: Customer get the products and feedback



**Q6: What's the lead time?**

A6: 1. Sample orders: 1-3 working days  
2. Bulk orders: 3-7 working days according to different quantities  
3. OEM: 7-12 working days on receipt of sample confirmation

## PACKAGING

### PACKAGING



### Shipping by



**Professional suggestion to choose the best shipping delivery (Such as EMS DHL TNT UPS and FEDEX) for your commodities according to your demand.**



**Changsha Enook Technology Co., Ltd**



+8617752866093



wendy@enooktech.com



enookbattery.com

ROOM 1717, JIEZUO BUILDING, NO. 828, SECTION 1, FURONG SOUTH ROAD, TIANXIN DISTRICT,  
CHANGSHA, HUNAN