



## 3.2V 230Ah Power LifePo4 Lithium ion Battery Cell For Electric Vehicle Power Tools

Our Product Introduction

for more products please visit us on [enookbattery.com](http://enookbattery.com)

### Basic Information

- Place of Origin: CN
- Brand Name: EVE
- Certification: MSDS,UL,UN38.3,CE
- Model Number: LF230
- Minimum Order Quantity: 4pcs
- Price: USD71.0-USD73.0
- Supply Ability: 10,000pcs per day

#### Ultra-long Life Cycle

Up to **5000** Cycles  
Capacity Retention  $\geq 80\%$

**230A**  
Capacity  
**3.2V**  
Voltage



Product Advantages

### Product Specification

- Application: Electric Vehicle/Power Tools/UPS/Solar Energy Storage
- Nominal Voltage: 3.2V
- Charge Temperature: 0-45
- Cycle Life: 2000 Times
- Protection: Overcharge/Overdischarge/Overcurrent/Short Circuit
- Highlight: **3.2V LifePo4 Lithium ion Battery, 230Ah LifePo4 Lithium ion Battery, 3.2V Electric Vehicle Lithium ion Battery**


#### Model List & Parameters

Model	Nominal Capacity (Ah)	Capacity (Ah)	Standard Voltage (V)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Terminal
LF10	3.2V 10	10	3.2V (0.5C/5C)	1.5	178.5±0.5	95.2±0.5	148.3±0.5	M6
LF10P	3.2V 10	10	3.2V (0.5C/5C)	2.0	190.5±0.5	128.8±0.5	148.3±0.5	M6
LF100	3.2V 100	100	3.2V (0.5C/5C)	6.5	1080.5±0.5	208.5±0.5	108.5±0.5	M6
LF1000	3.2V 1000	1000	3.2V (0.5C/5C)	65	10800.5±0.5	1080.5±0.5	108.5±0.5	M6
<b>LF230 3.2V 230Ah 230Ah 3.2V 230Ah 3.2V 230Ah 3.2V 230Ah</b>								
LF230	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230P	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230S	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230L	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230M	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230N	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230O	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230P	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230Q	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230R	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230S	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230T	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230U	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230V	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230W	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230X	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230Y	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6
LF230Z	3.2V 230	230	3.2V (0.5C/5C)	0.37	1680.5±0.5	208.5±0.5	128.5±0.5	M6

### More Images



#### Certificate



### Product Description

#### EVE LifePo4 3.2V 230ah Power Lithium LiFePO4 Battery Cell

Brand: EVE  
 Battery Model: LF230  
 Cell Grade: Brand New Grade A Cell  
 Chemistry: Lithium Iron Phosphate(LiFePO4 or LFP)  
 Nominal Capacity: 230Ah  
 Nominal Voltage: 3.2V  
 Operational Voltage: 2.5V-3.65V  
 AC Impedance Resistance:  $\leq 0.3m\Omega$   
 Weight:  $4.11\pm 0.1kg$   
 Dimensions (mm):  $207.3*173.9*54.0\pm 0.5mm$   
 Terminal: M6 Laser Welding Stud  
 Cycle Life:  $\geq 3500$  Cycles (Retention:  $\geq 80\%$ DOD)  
 Standard Charge and Discharge Charge/Discharge Current: 0.5C/0.5C  
 Standard Charge and Discharge Charge/Discharge Cut-off Voltage: 3.65V/2.5V  
 Continuous Charge/Discharge Current: 1C/1C  
 Pulse Charge/Discharge Current(30s): 2C/2C  
 Recommended SOC Window: 10% 90%  
 Charging Temperature: 0 ~60  
 Discharging Temperature: -30 ~60

Our Product Introduction

## Products Display

Product  
Advantages



## Model List & Parameters

Product  
Advantages

Model	Voltage (V)	Capacity (Ah)	Cycles (Ah)	Initial IR (<mΩ)	Weight (g)	Height (mm)	Width (mm)	Thickness (mm)
LF32	3.20	32	3500 (0.5C/0.5C)	1.5	730±50	94.3±0.5	148.3±0.8	26.7±0.5
LF50F	3.20	50	1500 (0.5C/0.5C)	2.0	1035±100	129.8±0.5	148.3±0.5	26.7±0.5
LF90K	3.20	90	6000 (1c/1C)	0.5	1994±50	200.5±0.5	130.3±0.3	36.7±0.5
LF100MA	3.20	101	2000 (0.5C/0.5C)	0.5	1920±100	118.5±0.5	160.0±0.8	50.1±0.5
LF100LA	3.20	102	5000 (0.5C/0.5C)	0.5	1985±100	118.5±0.5	160.0±0.8	50.1±0.5
LF105	3.20	105	4000 (0.5C/0.5C)	0.32	1980±60	200.5±0.5	130.3±0.5	36.35±0.5
LF160	3.20	160	4000 (0.5C/0.5C)	0.21	3000±100	153.5±0.5	173.9±0.5	53.85±0.5
LF173	3.20	173	4000 (0.5C/0.5C)	0.25	3190±96	207.5±0.5	173.9±0.5	41.06±0.5
LF230	3.20	230	4000 (0.5C/0.5C)	0.2	4140±124	207.2±0.5	173.9±0.5	53.85±0.5
LF280K	3.20	280	6000 (0.5C/0.5C)	0.25	5420±300	207.2±0.5	173.7±0.5	72.0±1.0
LF304	3.20	304	4000 (0.5C/0.5C)	0.16	5450±164	207.2±0.5	173.7±0.5	71.70.8

## Company Introduction

Product  
Advantages


ShenZhen Enook Technology Co., Ltd company is professional manufacturer and supplier of lithium energy solutions, E-bike battery pack, which focus on manufacturing and designing of lithium cells and battery packs



Quality first is our principle, Satisfying all our customers is our tenet, win-win business is our aim. Dedicated to strict quality control and thoughtful customer service, our experienced staff members are always available to discuss each detailed requirements from customer and ensure full customer satisfaction.



In addition, we have obtained certificates. MSDS UN38.3 MSDS, ROHS, UL, etc. All our products keep selling well not only around China, but also in USA, Philippines, Germany, England, Australia, Russia, France and other European and Asia countries

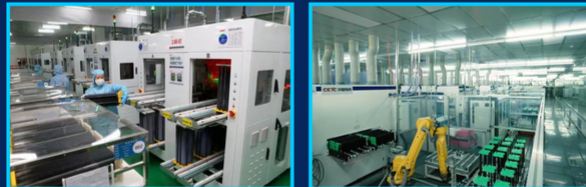

Fast delivery is one of our advantage, selecting a current products from catalogue, or customized products, 3~5 days is the normal time to prepare for the goods, OEM & ODM orders can be acceptable.

Quality is our life, price is our core competence, please don't hesitate to contact us if you have any requirement, we'll provide our best service to you.

Has passed CE certification and ROHS certification, excellent quality the company has obtained a number of patented technologies.

# Applications

Product  
Advantages

Our products have a very widely range of use



**Golf Cart**



**E-Bike**



**Balance E-scooter**



**Power Station  
energy storage**



**Solar Power**



**RC Drone**



**Sightseeing Car**



**Waterpump**



**Mobile Headlight**



**Household energy  
storage**



**Solar Street Lighth**



**Stereo Set**

# PACKAGING

Product  
Advantages



## Shipping by



**Professional suggestion to choose the best shipping delivery (Such as EMS DHL TNT UPS and FEDEX) for your commodities according to your demand.**

 **Changsha Enook Technology Co., Ltd**

+8617752866093    wendy@enooktech.com    enookbattery.com

ROOM 1717, JIEZUO BUILDING, NO. 828, SECTION 1, FURONG SOUTH ROAD, TIANXIN DISTRICT,  
CHANGSHA, HUNAN